

GENOMA


Gelenkfuß

- Fuß: Thermoplast, glasfaserverstärkt
- Einsatz: Stahl Güte 5.8, verzinkt, blau chromatiert
- Form B mit rutschfester Gummiauflage
- P = Statische Belastbarkeit bei senkrechter Druckbelastung in kN

Produktbild:



Zeichnung:

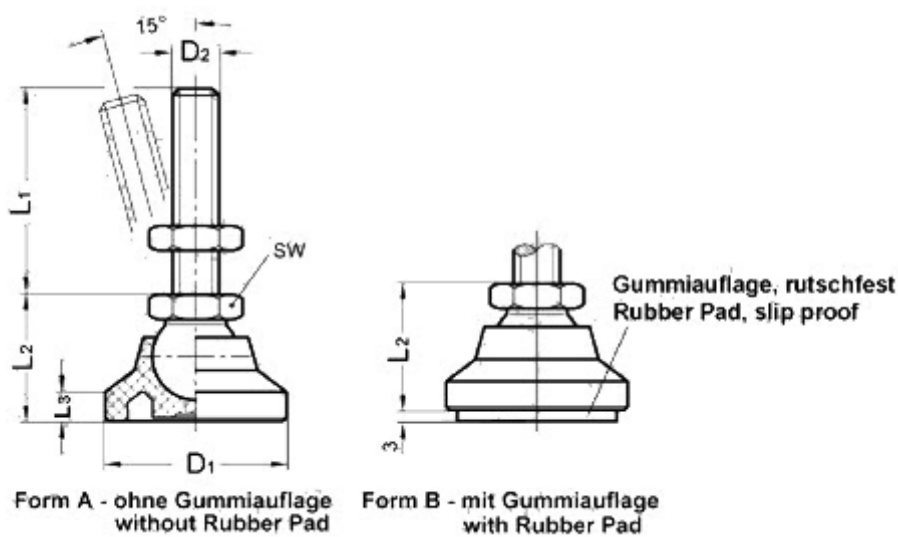

Produktoptionen:

D1	D2	L1	L2	L3	SW	P	Form	Bestell-Nr.
25	M8	40	19	4	13	5	A	675-401
25	M8	63	19	4	13	5	A	675-402
32	M10	50	23	5	16	7	A	675-403
32	M10	80	23	5	16	7	A	675-404
40	M12	63	26	6	18	10	A	675-405
40	M12	100	26	6	18	10	A	675-406
50	M12	63	28	7	18	10	A	675-407
50	M12	100	28	7	18	10	A	675-408

D1	D2	L1	L2	L3	SW	P	Form	Bestell-Nr.
60	M16	80	36	8,5	24	14	A	675-409
60	M16	125	36	8,5	24	14	A	675-410
25	M8	40	19	4	13	5	B	675-451
25	M8	63	19	4	13	5	B	675-452
32	M10	50	23	5	16	7	B	675-453
32	M10	80	23	5	16	7	B	675-454
40	M12	63	26	6	18	10	B	675-455
40	M12	100	26	6	18	10	B	675-456
50	M12	63	28	7	18	10	B	675-457
50	M12	100	28	7	18	10	B	675-458
60	M16	80	36	8,5	24	10	B	675-459
60	M16	125	36	8,5	24	14	B	675-460