

# GENOMA


## Stabgreifer in glatter Ausführung

- glatt, ohne Passungstoleranz
- max. Einsatztemperatur 450°C
- Oberfläche verzinkt, geschirmtes System
- AlNiCo 500

### Produktbild:



### Zeichnung:

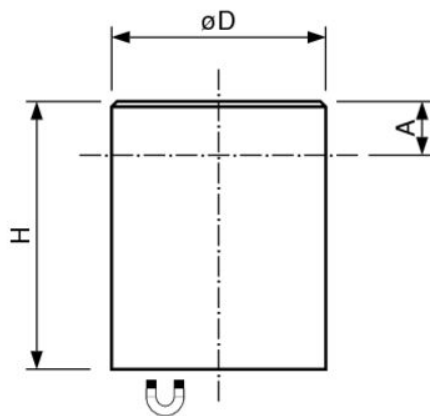

### Produktoptionen:

| D  | H  | A  | Gewicht [N] | Haltekraft | Bestell-Nr. |
|----|----|----|-------------|------------|-------------|
| 6  | 20 | 12 | 4,5         | 2          | PH.107-6    |
| 8  | 20 | 11 | 7,5         | 4          | PH.107-8    |
| 10 | 20 | 10 | 12          | 8,5        | PH.107-10   |
| 13 | 20 | 8  | 19          | 12         | PH.107-13   |
| 16 | 20 | 6  | 30          | 20         | PH.107-16   |
| 20 | 25 | 5  | 58          | 40         | PH.107-20   |
| 25 | 35 | 13 | 125         | 60         | PH.107-25   |
| 32 | 40 | 9  | 220         | 160        | PH.107-32   |

---

| <b>D</b> | <b>H</b> | <b>A</b> | <b>Gewicht [N]</b> | <b>Haltekraft</b> | <b>Bestell-Nr.</b> |
|----------|----------|----------|--------------------|-------------------|--------------------|
| 40       | 50       | 10       | 440                | 240               | PH.107-40          |
| 50       | 60       | 10       | 813                | 400               | PH.107-50          |
| 63       | 65       | 10       | 1306               | 660               | PH.107-63          |